

# 40-45 EXTENDABLE

CARRIES 1x 40' LOADED OR 1x 45' LOADED ISO CONTAINER  
COMPLIES TO ALL TOFC, AAR, DOT, FMVSS, ISO, SAE AND TTMA REQUIREMENTS.



## FUNCTIONAL ACCESSORIES

KINGPIN	JOST (USA) 2" AAR APPROVED WELDED TYPE
LANDING GEAR	JOST (USA) A440 MAGNUM - 17" TRAVEL, 2 SPEED WITH T FOOT

## RUNNING GEARS

AXLES	SAF (INDIA) " ROUND AXLES, 22,500 LBS CAPACITY, 71.5" TRACK WITH 16.5 X 7" Q BRAKES
HUBS AND DRUM	10 STUD HUB PILOTED WITH OUTBOARD CAST STEEL DRUMS
SUSPENSION	HUTCH (USA) 9700 SERIES 49" SPACING SUSPENSION WITH 354 HIGH ARCH SPRINGS

## BRAKE SYSTEM

ABS SYSTEM	KNORR BREMSE (USA) 2S/1M ABS
BRAKE ACTUATORS	HALDEX (MEXICO) 30/30 SB ACTUATORS
AUTO SLACKS	HALDEX (INDIA) AUTO SLACKS

## ELECTRICAL SYSTEM

HARNESSES	PHILLIPS (MEXICO) 12 VOLT MODULAR HARNESS
LIGHTS	PHILLIPS (USA) PERMALITE LED – MARKER LAMPS AND 4" ANTI THEFT STOP – TURN TAIL LAMPS

## RIMS & TIRES

RIMS	ASIA WHEELS (THAILAND) 8.25 X 22.5 WHITE POWDER COATED STEEL WHEELS OPTION: ALLOY RIMS (MALAYSIA)
TIRES	WESTLAKE (THAILAND) CR915 11 R 22.5 14 PR TIRES

## STRUCTURE

GOOSENECK MATERIAL	HOT ROLLED ASTM A572 GR50 / SM490YA SHEETS (THAILAND)
MAIN BEAM MATERIAL	HOT ROLLED 12" - 19 LBS/ FT - ASTM A992 GR 50 (THAILAND)
SLIDER BEAM MATERIAL	HOT ROLLED 8" - 18 LBS/ FT – ASTM A992 GR 50 (THAILAND)
GOOSENECK BEAM	5-1/4" HIGH X 4" WIDE FABRICATED I BEAM
CROSS MEMBER	3/16" THICK X 3" WIDE X 9" HIGH CHANNEL SUPPORTED WITH GUESSETS
FRONT BOLSTER	¼" THICK 8" WIDE X 10" HIGH WITH TAPER IN FULL LENGTH FOR GATHERING CONTAINER IN OPERATION WITH CORNER CASTINGS
REAR BOLSTER	¼" THICK C CHANNEL AND 5/16" TOP PLATE WITH CORNER NON RETRACTABLE TWIST LOCKS
SLIDER LOCKS	ACTUATED BY 24/24 LOCKING CHAMBERS THROUGH THE 3 <sup>RD</sup> GLAD HAND IN FRONT BOLSTER
REAR BUMPER	4" X 4" BOLT ON ICC REAR BUMPER

## CHASSIS COATING SYSTEM



PRIMER	2 MILS OF ZINC ENRICHED PRIMER FROM SHERWIN WILLIAMS
TOP COAT	2 MILS OF PU TOP COAT IN COLOR OF CHOICE FROM SHERWIN WILLIAMS

## OTHER FEATURES

PHILLIPS (USA) DOCUMENT HOLDER	BOLT ON TWIST LOCKS, BOLT ON ICC BUMPERS	BOLT ON LANDING GEAR BRACKETS
ANTI SAIL MUDFLAPS, DOT C2 TAPES	PSI – ATIS, GRADE 8.8 FASTENERS	

\*APPROX WEIGHT WITHIN ± 2% OF THE MENTIONED VALUE

40-45 EXTENDABLE

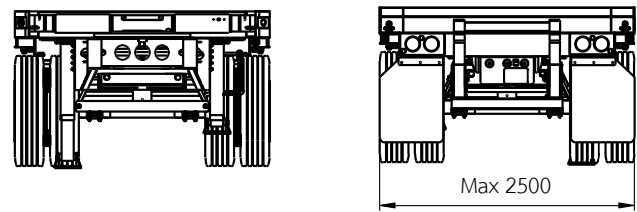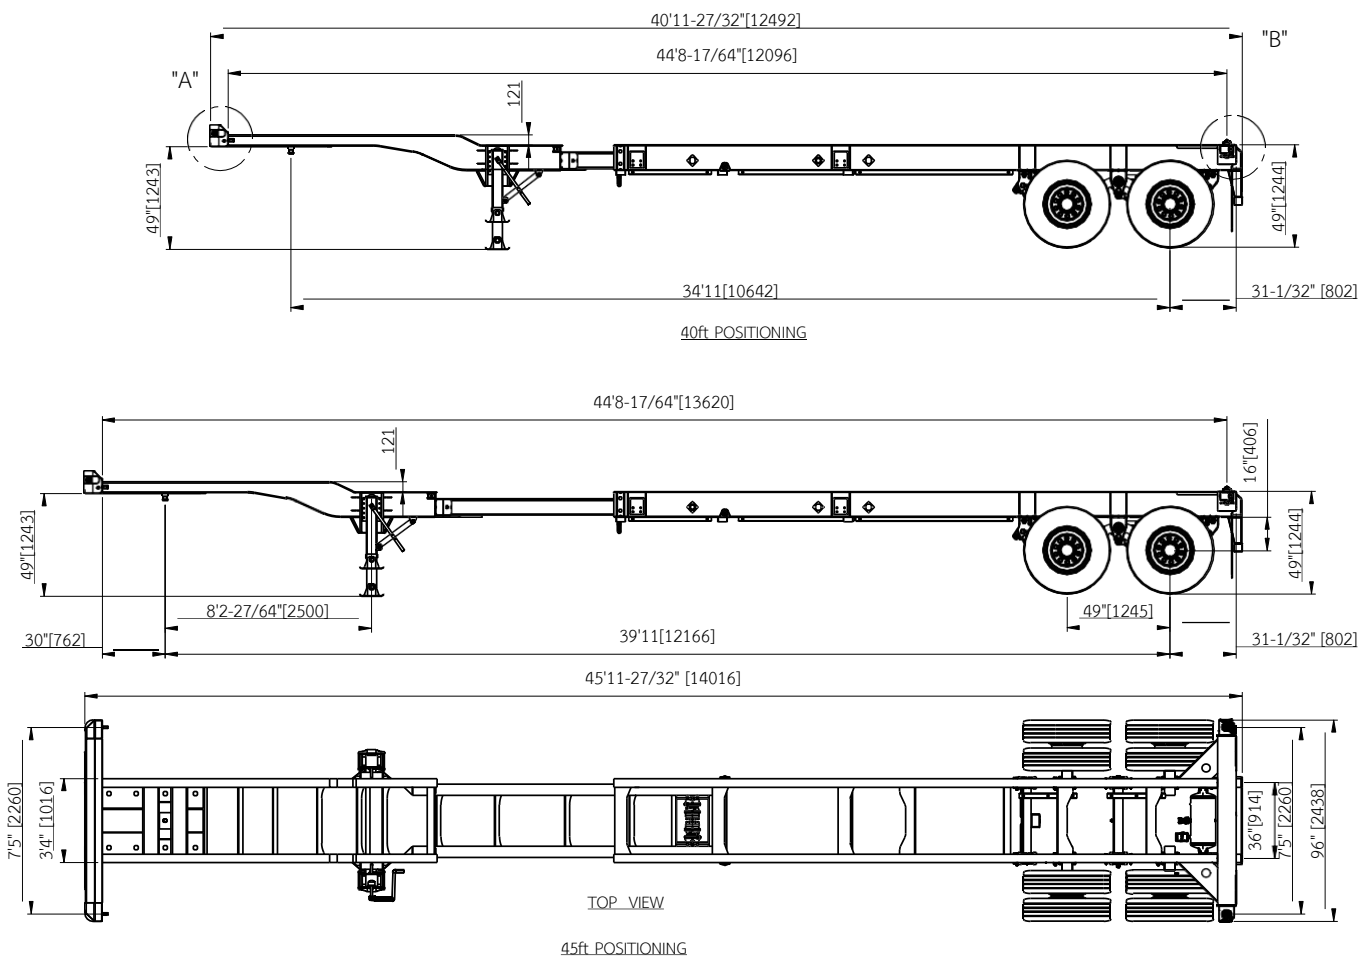

\*APPROX WEIGHT WITHIN ± 2% OF THE MENTIONED VALUE

DIMENSIONS	
OVERALL LENGTH	44' 8-17/64" EXTENDED 40' 11-27/32" RETRACTED
OVERALL WIDTH	96"
FIFTH WHEEL HEIGHT	48" ± 1"
REAR DECK HEIGHT	48" ± 1"
TARE WEIGHT	7,600 LBS ± 2%
GVWR	74,500 LBS